


CAFCO SprayFilm® – WB 2, WB 3, WB 4

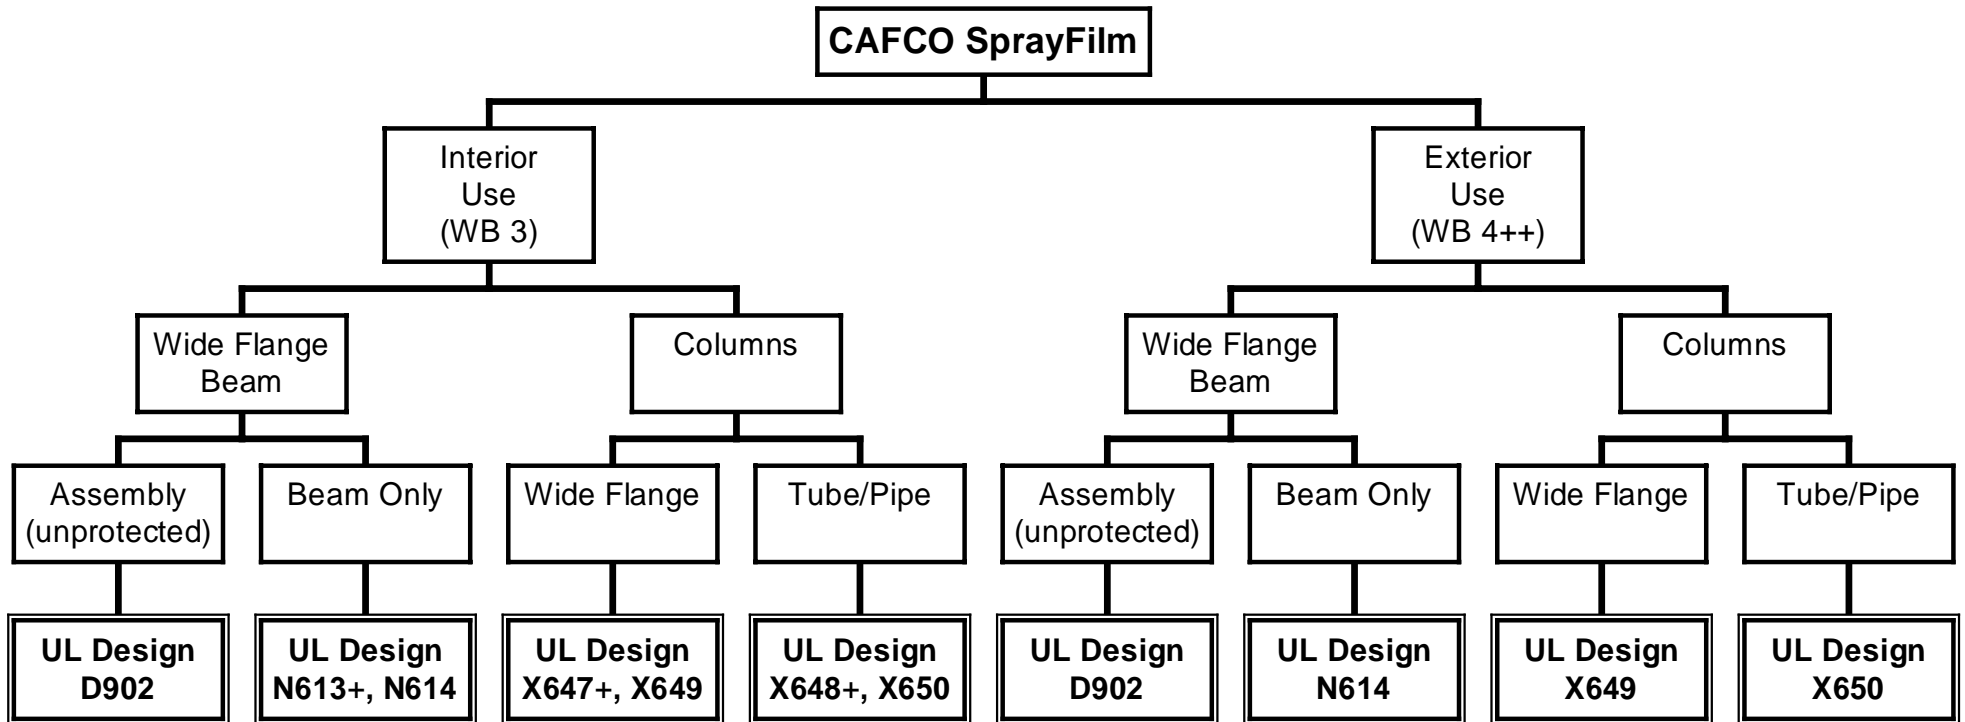

+ CAFCO SprayFilm – WB 2 (maximum 1 hr. fire rating).

++ CAFCO SprayFilm – WB 4 requires the use of CAFCO SprayFilm - TOPSEAL

Please refer to the Actual UL Designs for more detailed information, design limitations and thicknesses required. Contact the Isolatek International Technical Services department (1-800-631-9600 (option1) or your local representative for any additional information.

This chart is it not intended to take the place of careful analysis and review by the estimator.